

# MV 250/2 3+0 Multi-V6

**2 ply rubber belt, with fabric running side (bare back).  
Cover : 3 mm rubber with the Multi-V6 (height 6 mm) profile. Wear resistant.**

## Belt Composition and Technical Data

Type of Fabric	Polyester/Polyamide
Number of Plies	2
Cross-Stability	Suitable for trough
Total Thickness	5,2 mm (without profile)

Temperature Range	-20°C - +90°C
Tensile Strength	250 N/mm
Min. Pulley Diameters	220 mm
Max. Prod. Width	2.000 mm
Production Process	Classic press

## Top Cover

Rubber Type	SBR/NR Rubber
Thickness Top Cover	3 mm
Colour	Black
Hardness Cover	65° sh A
Profile	Multi V-6

## Bottom

Rubber Type	Fabric
Thickness	
Colour	
Hardness Cover	
Profile	


## Properties Of The Belt

Anti-Static	No
Oil and Grease Resist	No
Sliding Plate Support	Yes
Idler Support	Limited
Max. Through	30°

- Anti-abrasion top cover
- We can cut the Multi-V6 profile, both sides of the belt, away, to facilitate the belt being used with side skirting
- The V6 profile runs smooth on the return rollers of the installation

## Applications

- Harvesting and Agro Food Industry
- Logistics applications
- Applications in the mineral industry

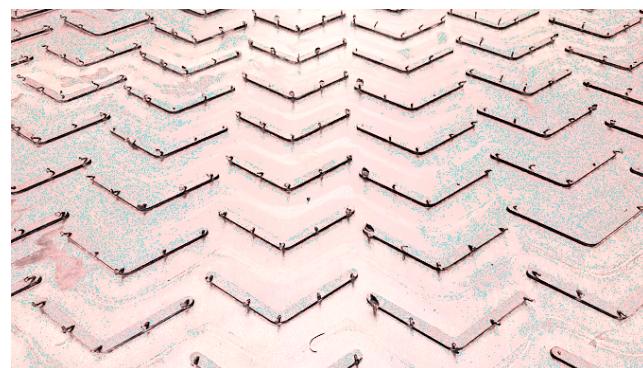

**ROTA  
BELTING.eu**

SPECIALISED CONVEYOR PARTS