

MV 250/2 3+0 G OIL Multi-V6

2 ply rubber belt, with fabric running side (bare back).

Cover : 3 mm rubber with the Multi-V6 (height 6 mm) profile. Full oil and grease resistant.

Belt Composition and Technical Data

Type of Fabric	Polyester/Polyamide
Number of Plies	2
Cross-Stability	Suitable for trough
Total Thickness	5,2 mm (without profile)

Temperature Range	-20°C - +90°C
Tensile Strength	250 N/mm
Min. Pulley Diameters	220 mm
Max. Prod. Width	2.000 mm
Production Process	Classic press

Top Cover

Rubber Type	NBR/NR Rubber
Thickness Top Cover	3 mm
Colour	Black
Hardness Cover	65° sh A
Profile	Multi V-6

Bottom

Rubber Type	Fabric
Thickness	
Colour	
Hardness Cover	
Profile	


Properties Of The Belt

Anti-Static	No
Oil and Grease Resist	Yes
Sliding Plate Support	Yes
Idler Support	Limited
Max. Through	30°

- Full oil and grease resistant
- We can cut the Multi-V6 profile, both sides of the belt, away, to facilitate the belt being used with side skirting
- The V6 profile runs smooth on the return rollers of the installation

Applications

- Recycling Industry
- Harvesting and Agro Food Industry
- Logistics applications, inclined transport of sacks

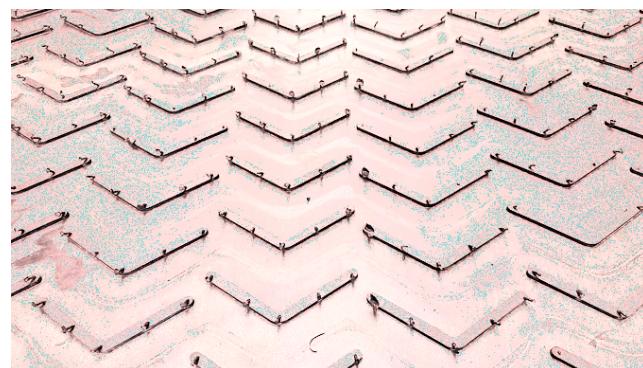

**ROTA
BELTING.eu**

SPECIALISED CONVEYOR PARTS